


Red 225 Carboxylated Rough Top

Phone (503) 289-7720 Fax (503) 289-8920 Toll Free (800) 234-2358

Application: A deep impression top cover on the Rough Top Belt provides thousands of flexible gripping fingers to hold packaged products or units being carried up or down steep grades to a maximum of 35 degrees. Brick Red Carboxylated Rough Top belt is a cost effective solution for highly abrasive incline applications. Excellent abrasion, oil & grease resistance in comparison to traditional roughtop belting. Carboxylated Rough Top provides greater service life than regular rough top. It is suited for applications requiring higher wear.

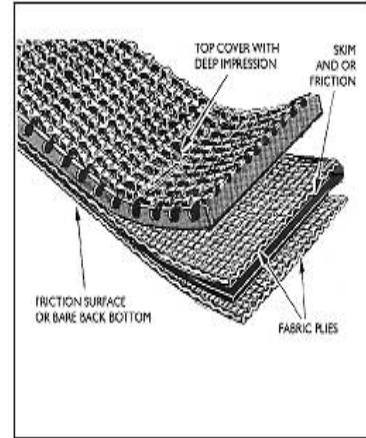

Typical Applications Include:

- Corrugated box industry
- Paper plants
- Stamping plants
- Lumber industry
- Recycling

Technical Data

	Imperial
Working Tension	225
Number Of Plies	3
Fabric Type	Synthetic
Top Surface	Carbox HDI
Bottom Surface	Bare
Overall Gauge	5/16"
Weight (Per Inch of Width)	.115
Minimum Rec. Pulley Diameters	4"
Working Temperature	-25/240 F

Splicing Methods

FOF	Finger	Bias Stepped	Clipper *	Alligator *	Staple *
NO	NO	YES	2	20	125

* Fastener manufacturer should be consulted to review belt and application information.

No warranty, including implied warranty of merchantability, fitness for a particular purpose, or other warranty of quality is either expressed or implied of this product. The information on this specification sheet supercedes all previously printed material.